



SIBAKZOS130 | SALT SPREADER 130L

General information

- High quality spreader suitable for different gritting materials and spreading widths.
- The spreading width will be determined by the speed of driving (max. 5 m width and max 20km/h). Unless a spread width limiter is added to reduce spread widths (e.g. for de-icing bicycle lanes).
- The flow rate is adjusted manually (10 levels possible).
- Standard execution is fitted for towing by forklift, with optional drawbar with ball coupling this spreader can be attached to vehicles
- Quick and easy assembly, supplied pre-assembled only a few bolts to screw
- Robust construction with aluminum casing
- Yellow plastic hopper with robust flap lid
- Painted tubular steel frame
- Pneumatic rubber tyres
- Drawbar parallel adjustable for height included
- Disengageable gearing

Options

- Drawbar with ball coupling (for towing by vehicle other than forklift)
- Spread width limiter
- Remote control (only for tractors or forklifts)
 - Length from operating lever 2,0 m
 - Weight: approx.. 3,000 kgs
 - Operation: manually

Technical information

Spreading width up to 5 m

Flow rates 10

Max thickness granulates 1,3

Hopper material PE

Material strength 3-4 mm







Base material painted steel


Weight approx. 39,000 kg

Max. speed 20 km/h

Packaging preassembled, wrapped with carton, 1 pce is placed on a euro pallet

Images

	
<p><i>SIBAKZOS130</i></p>	<p><i>Rugged transmission with aluminum housing</i></p>
	
<p><i>Drawbar with ball coupling</i></p>	<p><i>Disengageable gear</i></p>
 <p>Werfix bvba Mechelsveldstraat 30 - 2800 Mechelen Belgium BE 0882.332.685 T +32 4976925 info@werfix.be www.werfix.be</p>	
<p><i>Remote controle for tractor/forklift</i></p>	<p><i>Spreading width limiter</i></p>

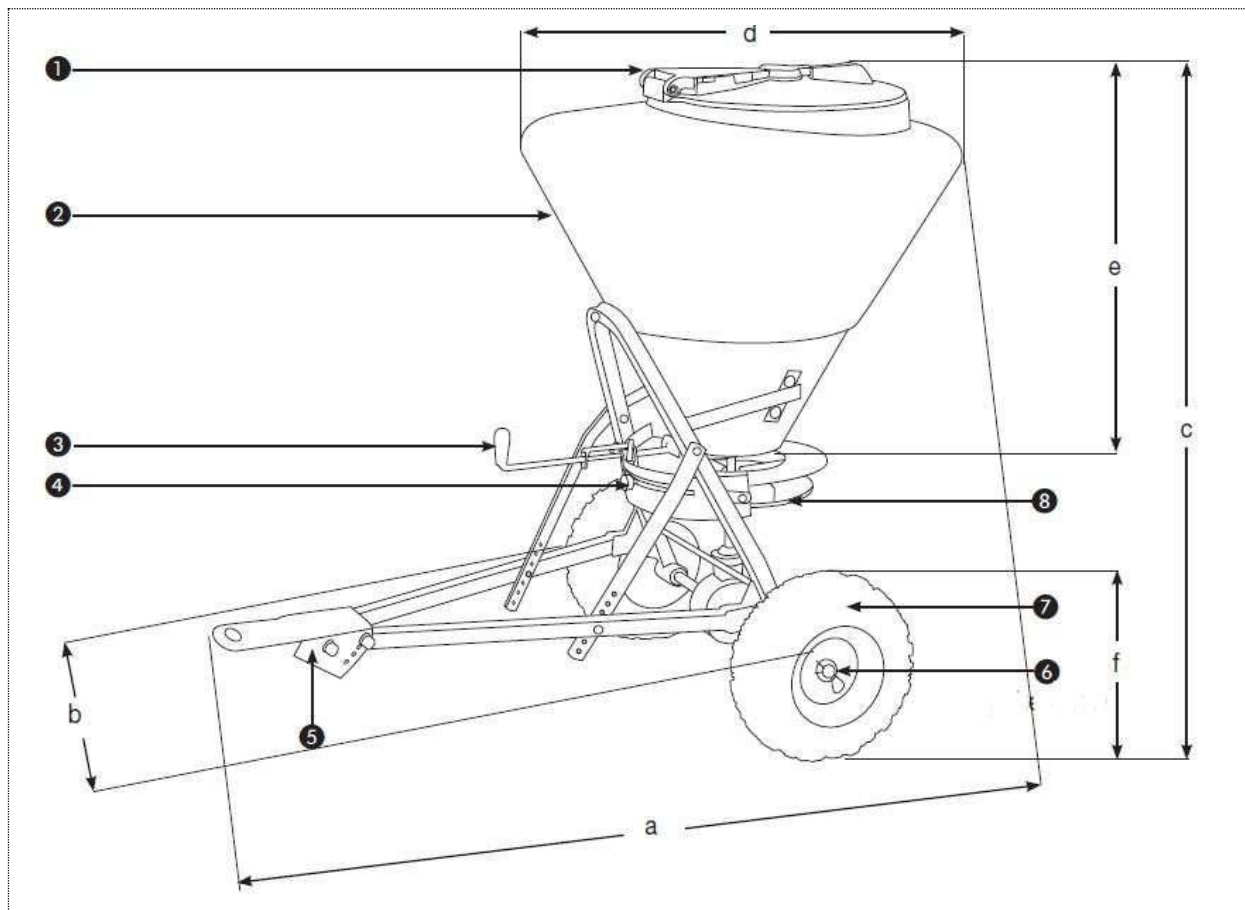

Dimensions

A 1.600 mm

D 780 mm

B 830 mm

E 750 mm

C 1.150 mm

F 320 mm

Parts

1 Closable lid from polyethylene

5 drawbar height regulator

2 PE hopper

6 disengageable wheel

3 spread regulator

7 Pneumatic tyre

4 flow regulator